


RUGGED COVER

951 Aiken Rd. • Owosso, MI 48867 • 989-725-8354 • Fax: 989-725-8409 • www.ruggedliner.com
1-800-433-3604

CYLINDER LATCH REPLACEMENT INSTRUCTIONS (If you have to replace it near the front or rear)

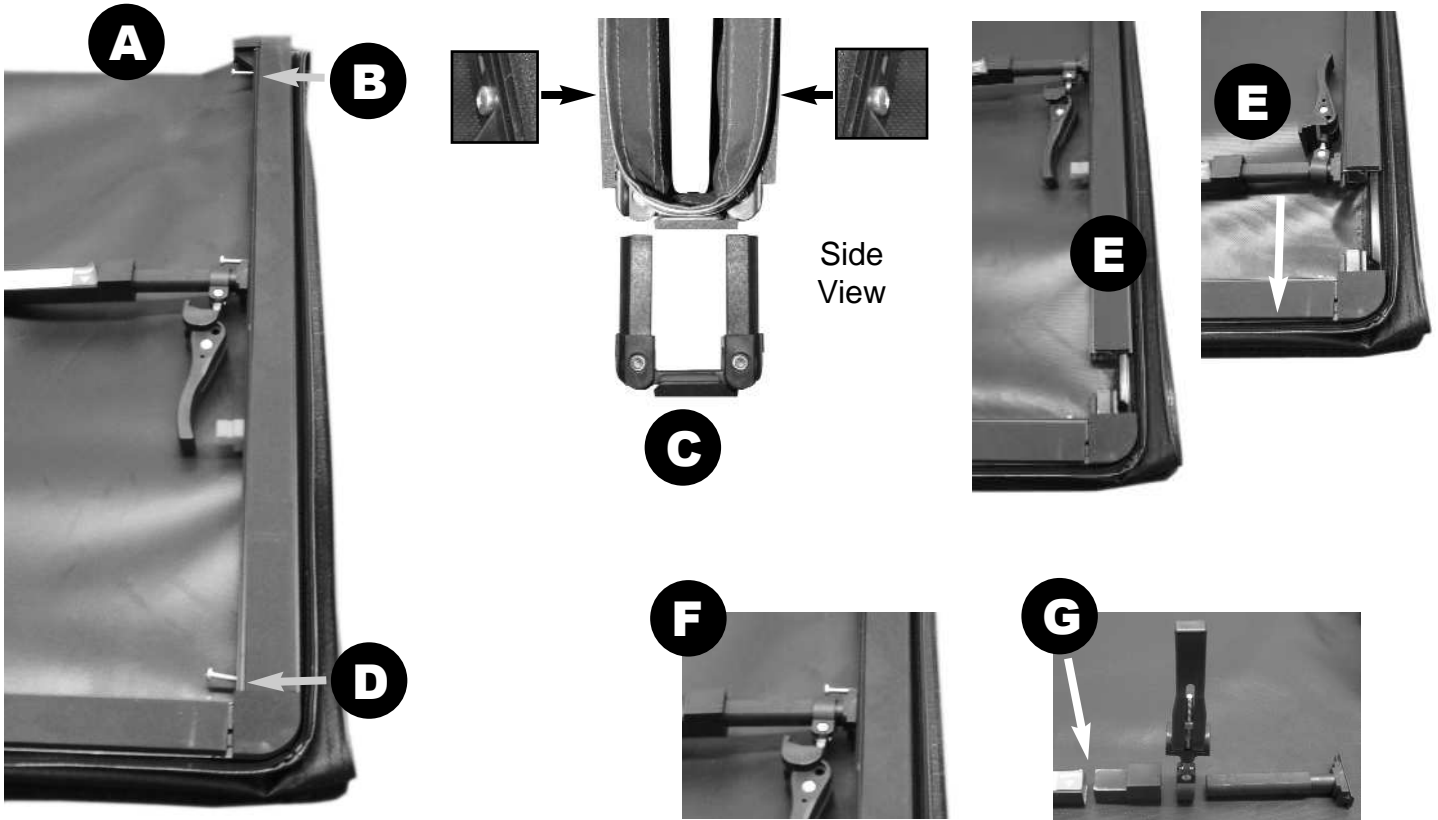


- A.** Fold front of cover in folding position.
- B.** Take screw(s) out of hinge on both sides.
- C.** Slide hinge out.
- D.** Take screw(s) out of corner piece from the side frame.
- E.** Slide frame out just enough away from the corners, so you can slide the cylinders and bow out of the side frame pieces.
- F.** Then take the screw(s) out of the cylinder that is attached to side frame pieces on both sides. Then slide the whole bar out of the side frame pieces with the cylinders attached.
- G.** If you cannot get the broken cylinder end piece out of the bow, just push it into the bow piece. Then push in the new cylinder end piece into bow end.
- H.** Put everything back together the way you took it apart.

Note:
When replacing collar with rod. Make sure that the rod angles toward side of bed.



- I.** When everything is put back together. Slowly push the cover down on a flat surface so the cover slides back into position in channel of the side frame pieces.

I

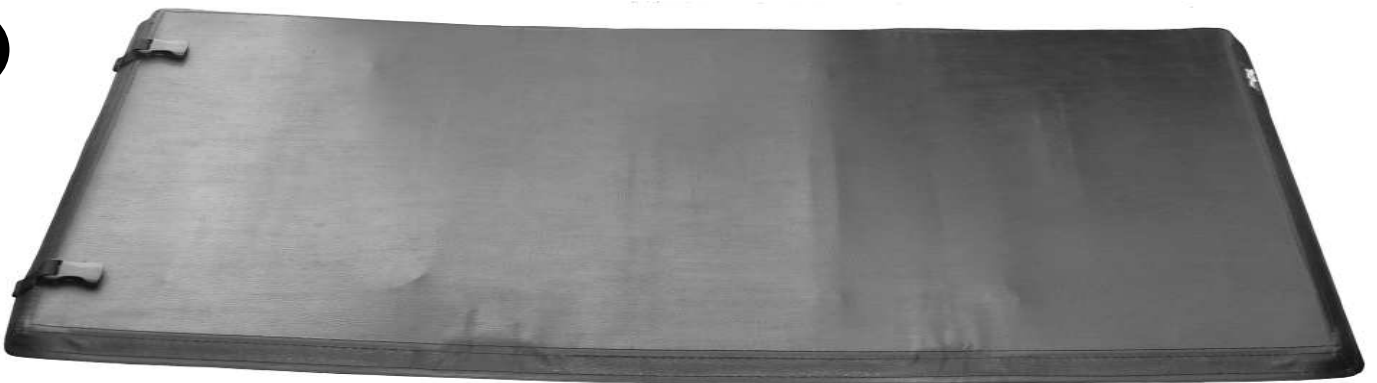

- J.** When you replace the handle receiver near the rear of tonneau cover, skip step **(F)** for safety strap.